
Pacific Standard Series with Face Mix



Where function meets style



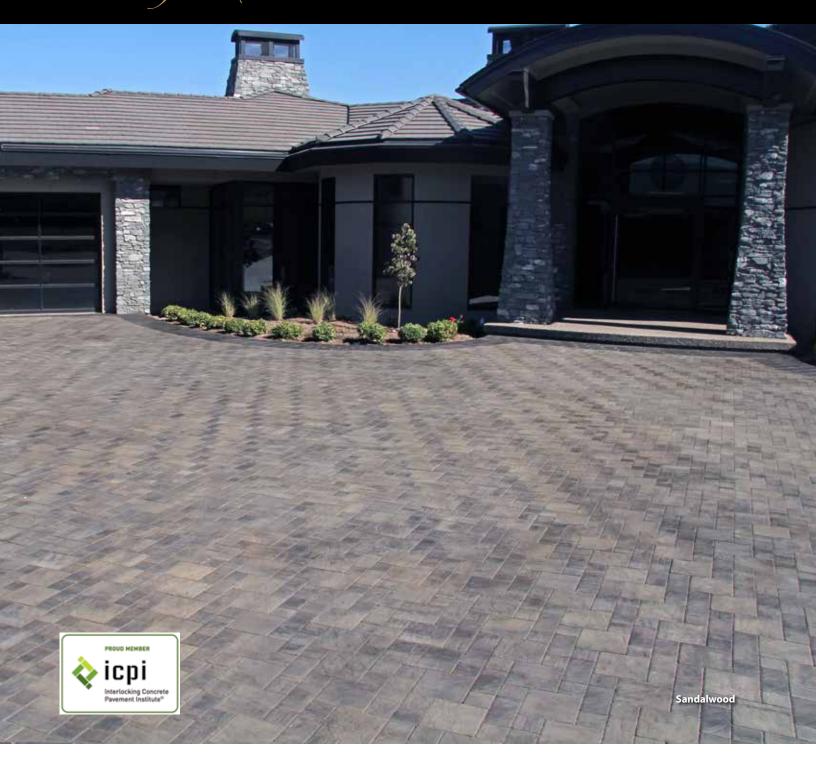

Our Pacific Slate Finish, with the sophisticated appearance of natural stone, opens up a variety of combinations whether used on its own or in conjunction with the Classic Standard Series. Pacific Slate Finish is available in Standard, Half Standard and Double Standard sizes.









Granite* Blend




Sandalwood* Blend



Indian Summer* Blend



Teak* Blend



How to get a professional look.

- 1. Compact and level the sub-base.
- 2. Backfill with 4" to 10" (100-250mm) of 3/4" minus road mulch or equivalent compacted granular fill.
- 3. Spread 1" (25mm) of concrete sand over fill. Avoid walking on the prepared base as this may cause the finished surface to be uneven.
- 4. Place Pacific Slate Standard Series pavers in the desired pattern close together The spacing should be consistent to help maintain a uniform pattern. Pavers can be cut to fit with a paver cutter or masonry saw.
- 5. Compact pavers with a mechanical plate compactor until level and firmly in place.
- 6. Fill joints completely by sweeping Abbotsford Concrete's joint sand across the surface, then compacting until joints are completely filled. The area is now ready for immediate use.

Specifications:

ABBOTSFORD CONCRETE PRODUCTS

Pavers are manufactured to ASTM C936/C936M-18 and CSA A231.2-19 specifications.

HydraPressed Slabs to ASTM C1782/C1782M-19 and CSA A231.1-19 specifications.

Concrete strength: 8000 PSI (55 MPA) shall not exceed 5% Absorption:


Weight:

2- ³/₈" (60mm): approx. 28lbs/ft² (140kg/m²) 3- ¹/₈" (80mm): approx. 37lbs/ft² (182kg/m²)

Visit our website at

www.pavingstones.com

for our complete product guide, color selection, design details and photo gallery, or call toll free 1-800-663-4091.

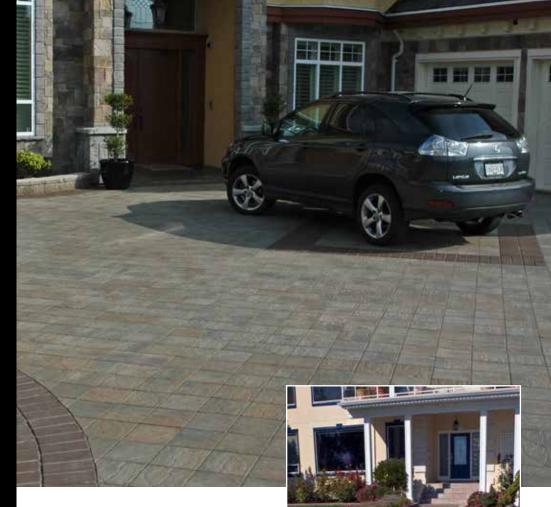

Half Standard

Length: 47/16" (112.5mm) 47/16" (112.5mm) Area: 7.3 stones/ft² 80 stones/m²

Thickness: 23/8" (60mm)



Standard

87/8" (225mm) Lenath: Width: 47/16" (112.5mm) 3.7 stones/ft² 40 stones/m²

Thickness: 23/8" (60mm)



Double Standard

Lenath: 87/8" (225mm) 8⁷/₈" (225mm) Width: 1.8 stones/ft Area: 20 stones/m²

Thickness: 23/8" (60mm)









Note: Due to this paver's unique profile, a special mat is required to be placed on the bottom of the compactor. Please contact your local dealer or Abbotsford Concrete technical representative for complete details.





ndian Summer