


*Sandstone*

**HydraPressed Slabs**

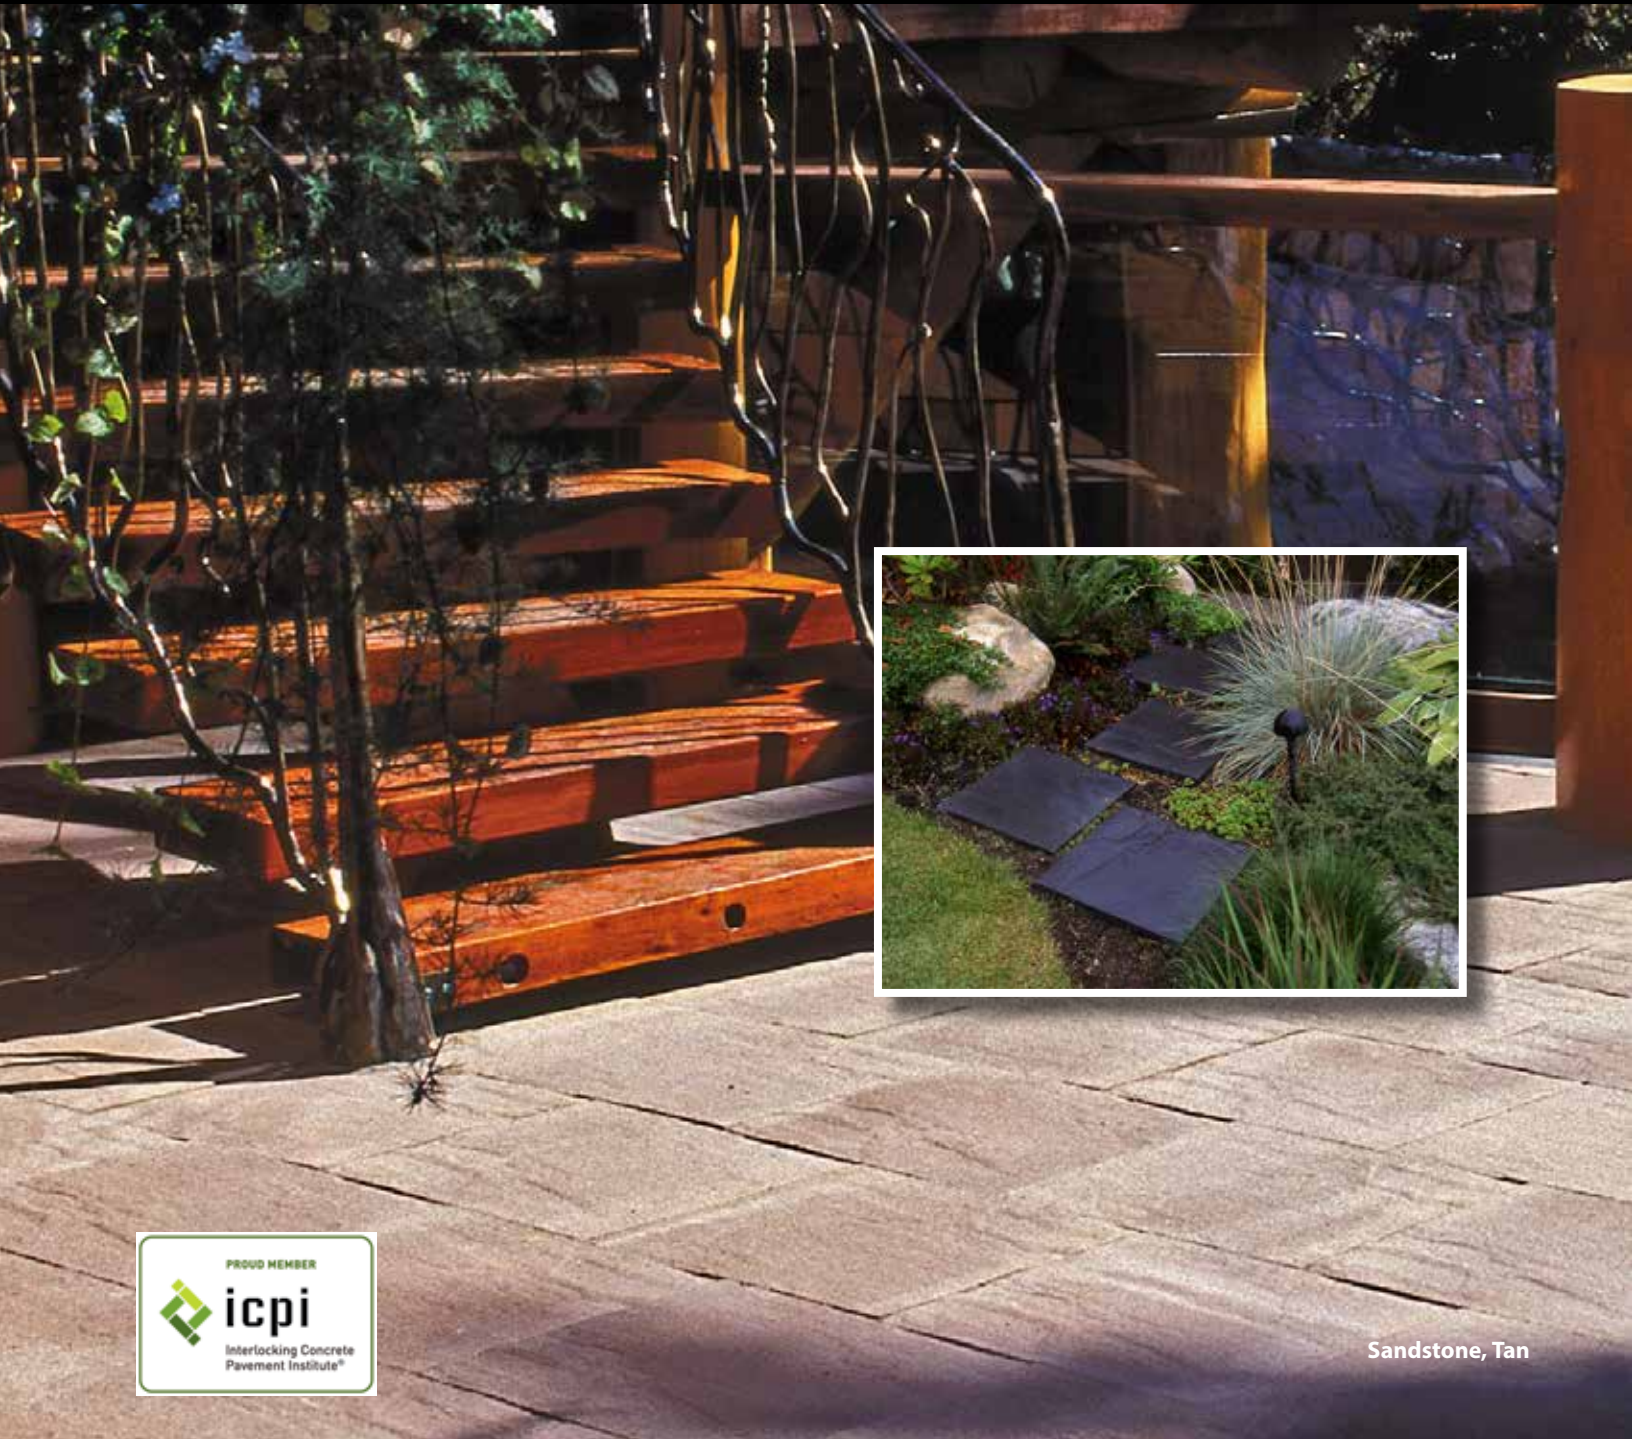

Sandstone, Tan

*Where function meets style*





*"Sandstone" HydraPressed Slabs are created by giving a light shot-blast to our Yorkstone for a soft textured finish.*

**Sandstone Colors**



**Natural**



**Charcoal**



**Desert Sand**



**Tan**



**Green** *special order*


**Sandstone HydraPressed Slabs**

Abbotsford Concrete's HydraPressed Slabs are made to precision sizes with true edges and top edges chamfered for a neat appearance.


HydraPressed Slabs are hydraulically pressed using an advanced method of producing concrete paving that requires 400 tons of hydraulic pressure, resulting in a cured slab with incredible strength.




**Pedestal Installation**

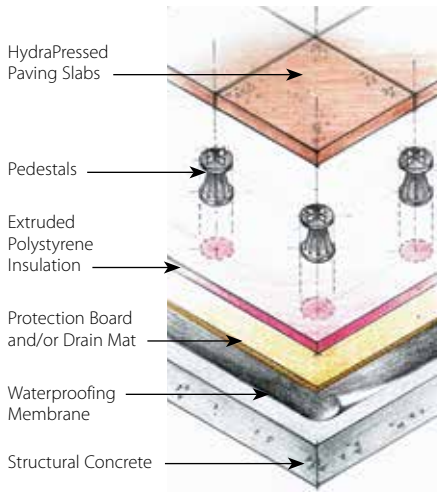

**Mortar Set**

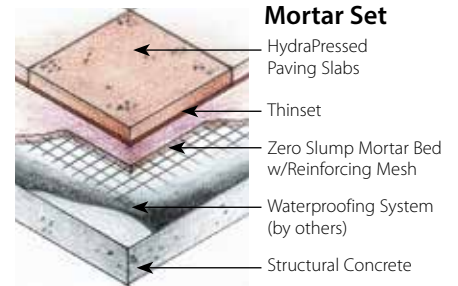

**Sand Set**

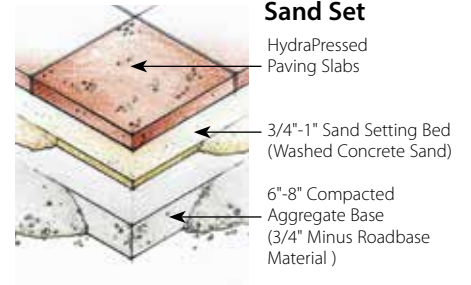

**Standard Sizes:**

24" x 12" x 2"	610mm x 305mm x 50mm
24" x 24" x 2"	610mm x 610mm x 50mm
18" x 18" x 1-5/8"	457mm x 457mm x 40mm

*Abbotsford Concrete Products' HydraPressed Slabs offer volume production, exacting standards and low cost... a winning combination suitable for any setting.*

**Specifications:**

**ABBOTSFORD CONCRETE PRODUCTS**

HydraPressed Slabs to CSA A231.1-19  
ASTM C1782/C1782M-19 specifications.

- Concrete strength:** 8000 PSI (55 MPA)
- Absorption:** shall not exceed 5%
- Flexural strength:** Average flexural (transverse) strength of the concrete paving slabs shall be at least 725 PSI (5 MPA) when tested in accordance with A231.1-19  
ASTM C1782/C1782M-19

*Center point load test of pedestal-supported slabs: 1800 lbs.*

Visit our website at

[www.pavingstones.com](http://www.pavingstones.com)

for our complete product guide, design details and photo gallery or call toll free 1-800-663-4091

