

## Dorado Series



### SINGLE COLOURS



Natural Grey



Charcoal




Sierra Beige

### BLENDED COLOURS



Winter Sky



Galaxy

### RECOMMENDED APPLICATIONS

60mm HEIGHT



Pedestrian



Walkways



Residential Driveway/Parking

80mm HEIGHT



Parking Lots



Vehicular Traffic


### Sizes



6" x 6" x 2-3/8"  
151mm x 151mm x 60mm  
Including 3 mm Spacer Bars  
Area: 4 stones/ft<sup>2</sup>  
43 stones/m<sup>2</sup>



6" x 12" x 2-3/8"  
151mm x 304mm x 60mm  
Including 3 mm Spacer Bars  
Area: 2 stones/ft<sup>2</sup>  
21.5 stones/m<sup>2</sup>



12" x 12" x 2-3/8"  
304mm x 304mm x 60mm  
Including 3 mm Spacer Bars  
Area: 1 stones/ft<sup>2</sup>  
10.75 stones/m<sup>2</sup>




9" x 4.5" x 3-1/8"  
228mm x 113mm x 80mm  
Including 3 mm Spacer Bars  
Area: 3.5 stones/ft<sup>2</sup>  
38 stones/m<sup>2</sup>

### Installation

#### SAND SET

- 1 Standard Paver
- 2 Sand joint fill
- 3 Bedding Sand 1"
- 4 Extra width equal to foundation thickness
- 5 Lawn
- 6 Plastic edge or other type of edge restraint
- 7 Nail
- 8 Geotextile (optional)
- 9 Compacted aggregate base with 3/4" minus material
- 10 Subgrade

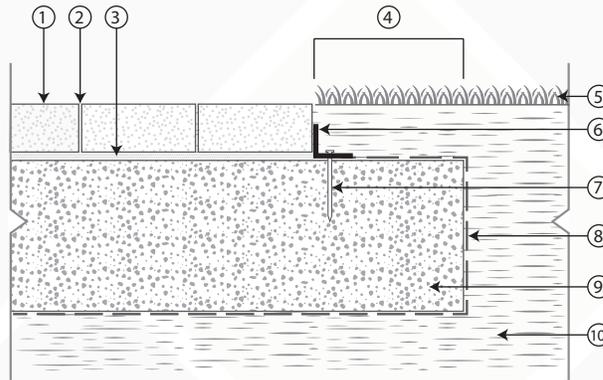

### Specifications

Pavers are manufactured to ASTM C936 and CSA A231.2-06 specifications.

#### CONCRETE STRENGTH

8000 PSI (55 MPA)

#### ABSORPTION

Shall not exceed 5%

#### WEIGHT

2-3/8 (60 mm): approx. 26.8 lbs/ft<sup>2</sup> (130kg/m<sup>2</sup>)  
3-1/8 (80 mm): approx. 36.5 lbs/ft<sup>2</sup> (180 kg/m<sup>2</sup>)